


## PSSu H m F DP SN SD

312065

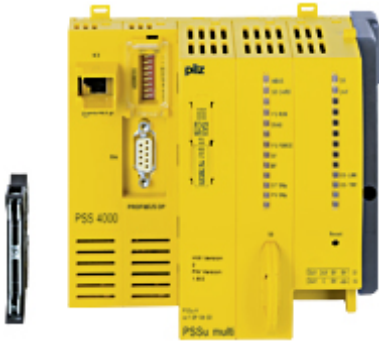

Head module, PROFIBUS-DP (12 MBit/s), SafetyNET p RTFN, SD card PL e, SIL CL 3.

### Technical details

Certifications:	CE;cULus Listed;EAC (Eurasian);TÜV;KOSHA
Number of Ethernet interfaces:	1
Number of PROFIBUS-DP interfaces:	1
Application in accordance with:	IEC 61508;ISO 13849-1
Application range:	Standard/failsafe
Permitted number of expansion modules:	64
Supply voltage (V):	24,0
Supply voltage type:	DC
Protection type, housing:	IP20
Width dimension:	130.0 mm
Height dimension:	125.6 mm
Depth dimension:	83.7 mm
Gross weight:	415 g
Net weight:	375 g
Ambient temperature:	0 - 60 °C

### Accessories



313110

PSSu A Con 1/4 S (2 pcs.)



313111

PSSu A Con 2/8 C (2 pcs.)

## Optional accessories



312070

PSSu H PLC1 FS SN SD



312085

PSSu H FS SN SD



312900

PSSu A ET (10 pcs.)



312901

PSSu A ETM (2 pcs.)



312902

PSSu A EC



312949

PSSu A ET PE (10 pcs.)



312958

PSSu A LA0 (10 x 108 pcs.)



312967

PSSu A LA0.1 (10 x 108 pcs.)



313100

SD Memory Card 512MB



380000

SafetyNET p Cable per mtr



380001

SN CAB RJ45s RJ45s, 0,5m



380003

SN CAB RJ45s RJ45s, 1m



380005

SN CAB RJ45s RJ45s, 2m



380007

SN CAB RJ45s RJ45s, 5m



380009

SN CAB RJ45s RJ45s, 10m



380400

SafetyNET p Connector RJ45s



380600

PSSnet SLL 5T

---



380602

PSSnet SHL 6T 2FMMS MRP

---



380650

PSSnet SHL 6T 2FSMSC MRP

---



380604

PSSnet SLL 4T 1FMMS

---



312071

PSSu H PLC1 FS DP SN SD

---



314070

PSSu H PLC1 FS SN SD-T

---



314085

PSSu H FS SN SD-T

---



312066

PSSu H m F DPsafe SN SD

---



314071

PSSu H PLC1 FS SN SD M12-T

---