


PNOZ m2p ETH

773123

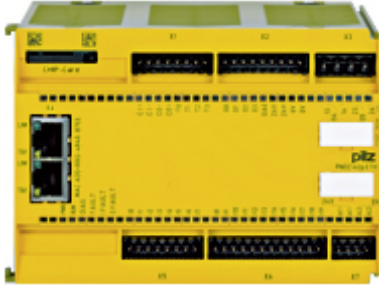


Configurable safety system PNOZmulti base module semiconductor outputs, 2 safe relay outputs.

Technical details

Certifications:	CE;cULus Listed;BG;EAC (Eurasian);TÜV;CCC;KCC
Base unit:	Yes
Number of digital inputs:	20
Number of test pulse outputs:	4
Number of relay outputs:	2
Number of semiconductor outputs:	4
Number of cascading outputs:	1
Supply voltage (V):	24,0
Supply voltage type:	DC
Permitted number of expansion modules:	8
Number of Ethernet interfaces:	2
Terminal type:	Screw terminal;Spring-loaded terminal
Version for extreme environ. conditions:	Standard
Width dimension:	135.0 mm
Height dimension:	94.0 mm
Depth dimension:	121.0 mm
Gross weight:	542 g
Net weight:	521 g
Ambient temperature:	0 - 60 °C

Accessories



773010B

Basic Licence for PNOZmulti Config.



779201

PNOZmulti Chipcard 1 piece 8kb



779211

Chipcard 1 piece 32kB



783100


PNOZ m1p Set spring loaded terminals



793100


PNOZ m1p/m0p plug in screw terminals

Optional accessories




773010K

User Licence for PNOZmulti Config



773010U

Basic Upgr Licence for PNOZmulti Config



773010V

User Upgr Licence for PNOZmulti Config



773011B

Basic Licence for PNOZmulti Service



773011K

User Licence for PNOZmulti Service



773011U

Basic Upgr Licence for PNOZmulti Service



773011V

User Upgr Licence for PNOZmulti Service



774639

KOP-XE



779110

PNOZmulti Bus-Terminator



779200

PNOZmulti Chipcard Set 10 piece 8KB



779212

PNOZmulti Chipcard Set 10 pieces 32kB



779230

PNOZ Chip Card Reader



779240

PNOZmulti Chipcard Holder (Sparepart)



779250

PNOZmulti Seal 12 pieces



773011L

Lite Licence for PNOZmulti Service



773010L

Lite Licence for PNOZmulti Config.
