


## PZE 9 230-240VAC 8n/o 1n/c

774148

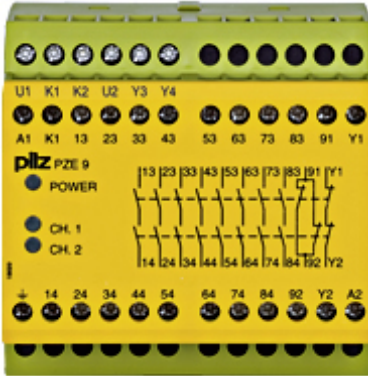

Contact expansion Inputs: ability to detect shorts across contacts Outputs: 8 N/O, 1 N/C UB 230 - 240 V AC, width: 90 mm, Contact block for contact expansion + amplification in connection with safety-related control components.

## Technical details

Certifications:	CE;cULus Listed;EAC (Eurasian);TÜV;CCC
Application options:	Instantaneous contact expansion
Operating modes:	Single-channel;Dual-channel;Detection of shorts across contacts;without detection of shorts across contacts
Standards:	EN 60204-1;EN 62061;EN ISO 13849-1;VDE 0113-1
Supply voltage (V):	230,0 - 240,0
Supply voltage type:	AC
Terminal style:	fixed
Terminal type:	Screw terminal
Number of instantaneous safety contacts:	8
Number of delayed safety contacts:	0
Number of auxiliary contacts:	1
Max. current at DC13 I (6 cycles/min):	7.0 A
Voltage at AC15:	230 V
Width dimension:	90.0 mm
Height dimension:	87.0 mm
Depth dimension:	121.0 mm
Gross weight:	610 g
Net weight:	600 g
Ambient temperature:	-10 - 55 °C