


PU3Z 120-240VAC 3n/o 1n/c 6so

775505

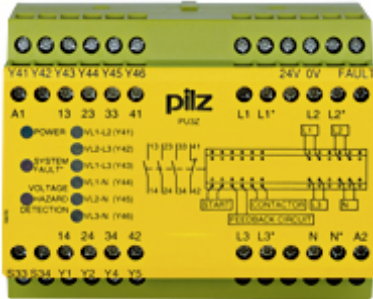

Safety relay (standalone) Outputs: 3 N/O, 1 N/C, 6 semiconductor. Automatic/manual reset UB 120 - 240 V AC, width: 112.5 mm, Voltage monitor, safely monitors the voltage in three-phase supplies.

Technical details

Certifications:	CE;cULus Listed;EAC (Eurasian);TÜV;CCC
Application options:	Safe voltage monitoring
Operating modes:	Automatic reset;Dual-channel;Manual reset;Self test
Standards:	EN 60204-1;EN 62061;EN ISO 13849-1;EN ISO 14119;VDE 0113-1
Supply voltage (V):	120,0 - 240,0
Supply voltage type:	AC
Terminal style:	fixed
Terminal type:	Screw terminal
Number of semiconductor outputs:	6
Max. current at DC13 I (6 cycles/min):	5.0 A
Max. current at AC15:	5.0 A
Measuring circuit frequency range:	50 - 60
Width dimension:	112.5 mm
Height dimension:	87.0 mm
Depth dimension:	121.0 mm
Gross weight:	745 g
Net weight:	735 g
Ambient temperature:	-10 - 55 °C