


## PNOZ 1 110-120VAC 3n/o 1n/c

775630

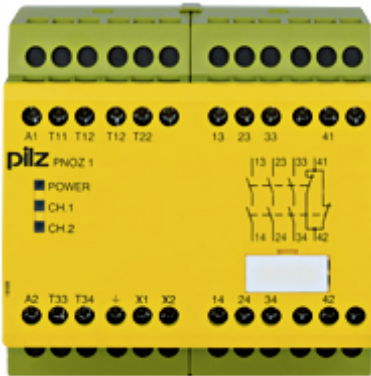

Safety relay (standalone) Inputs: 1-/2-channel wiring without detection of shorts across contacts Outputs: 3 N/O, 1 N/C UB 110-120 V AC, width: 90 mm, integral screw terminals, Monitoring E-STOP, safety gates.

## Technical details

|  |  |
|--|--|
| Certifications:                          | CE;cULus Listed;EAC (Eurasian);TÜV;CCC                           |
| Application options:                     | Instantaneous E-STOP monitoring;Limit switch;Safety gate monitor |
| Operating modes:                         | Single-channel;Automatic reset;Dual-channel;Manual reset         |
| Product standard:                        | EN 60947-5-1   |
| Standards:                               | EN 60204-1;EN 62061;EN ISO 13849-1;VDE 0113-1                    |
| Supply voltage (V):                      | 110,0 - 120,0  |
| Supply voltage type:                     | AC   |
| Terminal style:                          | fixed  |
| Terminal type:                           | Screw terminal   |
| Number of instantaneous safety contacts: | 3  |
| Number of delayed safety contacts:       | 0  |
| Number of auxiliary contacts:            | 1  |
| Number of semiconductor outputs:         | 0  |
| Stop category:                           | 0  |
| Max. current at DC13 I (6 cycles/min):   | 7.0 A  |
| Max. current at AC15:                    | 5.0 A  |
| Width dimension:                         | 90.0 mm  |
| Height dimension:                        | 87.0 mm  |
| Depth dimension:                         | 121.0 mm   |
| Gross weight:                            | 510 g  |

|                      |             |
|----------------------|-------------|
| Net weight:          | 500 g       |
| Ambient temperature: | -10 - 55 °C |