


## PNOZ X10.11P C 24VDC 6n/o 4n/c 6LED

787750

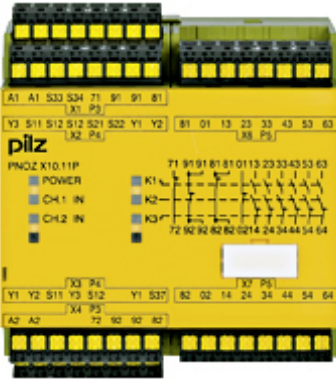

Safety relay (standalone) Inputs: 1-/2-channel wiring with/without detection of shorts across contacts Outputs: 7 N/O, 2 N/C, 2 semiconductor. Automatic/monitored start UB 24 V DC, width: 90 mm, plug-in spring-loaded terminals. Monitoring E-STOP, safety gates.

### Technical details

Certifications:	CE;cULus Listed;EAC (Eurasian);TÜV;CCC
Application options:	Instantaneous E-STOP monitoring;Limit switch;Light beam device mon. Type 2 with t/p;Light beam device mon. Type 2 w/o t/p;Light beam device mon. Type 4;Safety gate monitor
Operating modes:	Single-channel;Automatic reset;Dual-channel;Manual reset;Detection of shorts across contacts;Monitored manual reset;without detection of shorts across contacts
Product standard:	EN 60947-5-1
Standards:	EN 60204-1;EN 62061;EN ISO 13849-1;VDE 0113-1
Supply voltage (V):	24,0
Supply voltage type:	DC
Terminal style:	Plug-in
Terminal type:	Spring-loaded terminal
Number of instantaneous safety contacts:	6
Number of delayed safety contacts:	0
Number of auxiliary contacts:	4
Number of semiconductor outputs:	0
Stop category:	0
Max. current at DC13 I (6 cycles/min):	7.0 A
Max. current at AC15:	5.0 A
Width dimension:	90.0 mm
Height dimension:	101.0 mm


Depth dimension:	121.0 mm
Gross weight:	590 g
Net weight:	580 g
Ambient temperature:	-10 - 55 °C

## Optional accessories



374291

PNOZ X Set spring loaded terminals P3+P4



374292

PNOZ X Set spring loaded terminals P5+P5