


## PMUT X1P C 24VDC 3n/o 1n/c 5so

788010

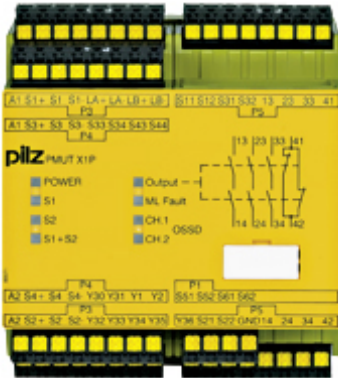

Safety relay (standalone) Inputs: 2-channel wiring with/without detection of shorts across contacts 4 muting sensors. Outputs: 3 N/O, 1 N/C, 5 semiconductor. Automatic/monitored start UB 24 V DC, width: 90 mm, plug-in spring-loaded terminals Device for the temporary suspension of safety functions, muting, monitoring of muting lamps and their automatic switching.

### Technical details

Certifications:	CE;cULus Listed;EAC (Eurasian);TÜV;CCC
Application options:	Instantaneous E-STOP monitoring
Operating modes:	Dual-channel;Manual reset;Detection of shorts across contacts;without detection of shorts across contacts
Product standard:	EN 61496-1
Standards:	EN 60204-1;EN ISO 13849-1;VDE 0113-1
Supply voltage (V):	24,0
Supply voltage type:	DC
Terminal style:	Plug-in
Terminal type:	Spring-loaded terminal
Number of instantaneous safety contacts:	3
Number of auxiliary contacts:	1
Number of semiconductor outputs:	4
Stop category:	0
Max. current at DC13 I (6 cycles/min):	5.0 A
Voltage at AC15:	240 V
Max. current at AC15:	5.0 A
Width dimension:	90.0 mm
Height dimension:	101.0 mm
Depth dimension:	121.0 mm
Gross weight:	575 g

Net weight:	565 g
Ambient temperature:	-10 - 55 °C

## Optional accessories



374290

PNOZ X Set spring loaded terminals P1+P2



374291

PNOZ X Set spring loaded terminals P3+P4



374292

PNOZ X Set spring loaded terminals P5+P5