


## PNOZ V 300s 24VDC 3n/o 1n/c 1n/o t

774791

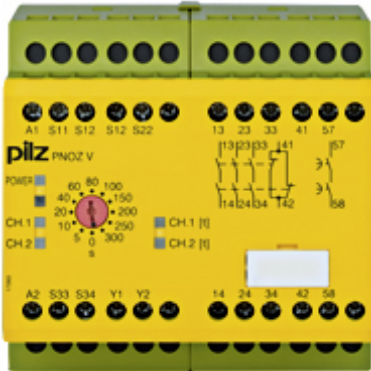

Safety relay (standalone) Inputs: 1-/2-channel wiring without detection of shorts across contacts Outputs: 3 N/O, 1 N/C, 1 N/O delayed UB 24 V DC, width: 90 mm, integral screw terminals, Monitoring E-STOP, safety gates with a delay-on de-energisation contact. Release time 12 stages from 0 - 300 s.

### Technical details

Certifications:	CE;cULus Listed;EAC (Eurasian);TÜV;CCC
Application options:	Instantaneous E-STOP monitoring;Limit switch;Safety gate monitor;Delayed E-STOP monitoring
Operating modes:	Single-channel;Automatic reset;Dual-channel;Manual reset
Product standard:	EN 60947-5-1
Standards:	EN 60204-1;EN 62061;EN ISO 13849-1;VDE 0113-1
Supply voltage (V):	24,0
Supply voltage type:	DC
Terminal style:	fixed
Terminal type:	Screw terminal
Number of instantaneous safety contacts:	3
Number of delayed safety contacts:	1
Safety contact delay type:	Delay-on de-energisation
Number of auxiliary contacts:	1
Number of semiconductor outputs:	0
Selectable times:	0,15 s;10,00 s;100,00 s;150,00 s;20,00 s;200,00 s;250,00 s;300,00 s;40,00 s;5,00 s;60,00 s;80,00 s
Stop category:	0/1
Max. current at DC13 I (6 cycles/min):	7.0 A
Max. current at AC15:	5.0 A
Width dimension:	90.0 mm

Height dimension:	87.0 mm
Depth dimension:	121.0 mm
Gross weight:	485 g
Net weight:	475 g
Ambient temperature:	-10 - 55 °C